



TRAILERS

VERSATILITY FOR VERSATILE NEEDS.


GET-HX TRAILER

- COMES STANDARD WITH: (1) 5.0 TON HVAC, (1) 15 KW GENERATOR (SHELTERS SOLD SEPARATELY).
- FEATURES A DEXTER TORFLEX AXLE SYSTEM.
- COMPATIBLE WITH MOST HEAVY-DUTY TRUCKS OR VANS AND ANY HITCH TYPE.
- CUSTOM COLORS AVAILABLE.

At Deployed Logix we're redefining rapid deployment. Through our extensive work with law enforcement, search and rescue teams, various first responders, private organizations both domestically and abroad, and the military, our team understands that when a crisis calls, seconds count. Discover why we are the leader in American-made, rapidly deployable disaster preparedness products.

Specification and design may be altered without notice due to continuous product development. LAST UPDATED OCTOBER 2023.

Proudly made in the USA.
CAGE CODE: 7CFK2 | DUNS#: 079751064

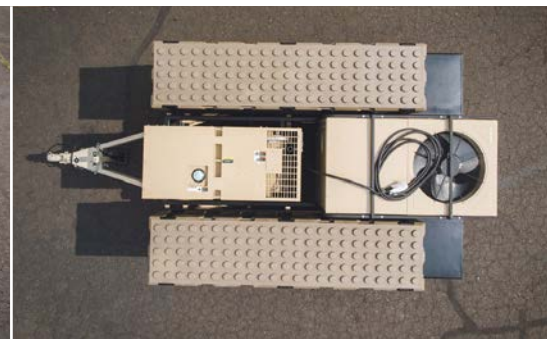

GET-HX TRAILER SPECIFICATIONS	
TRAILER DIMENSIONS (L X W):	186 x 96 in (472.4 x 243.8 cm)
TRACK WIDTH:	75 in (190.50 cm)
GROUND CLEARANCE (UNDER AXLE):	14 in (35.56 cm)
ADJUSTABLE COUPLER HEIGHT:	26.50 in (67.31 cm) +/- 4 in (10.16 cm)
COUPLER TYPE:	2 5/16 in (13.49 cm) ball standard (pintle available)
DECK DIMENSIONS (L X W X H):	144.50 x 25.25 x 37.50 in (367.03 x 64.13 x 95.25 cm)
SUSPENSION TYPE:	Independent torsion axle
AXLE RATING:	6000 lb (2721.5 kg)
WHEELS:	17 x 8 in (43.18 x 20.32 cm) Aluminum 6 lug
TIRES:	35 x 12.5R17 BF Goodrich® KM3 or equivalent
BRAKES:	Electric drum
ELECTRICAL CONNECTION:	7-way flat connector
DEPARTURE ANGLE:	22°
TURNING ANGLE:	71°
BEST CASE BY DLX™ STORAGE AREA SPECIFICATIONS	
DRIVER // PASSENGER SIDE:	26.50 x 144.50 in (67.31 x 367.03 cm)
CENTER PAN:	44 x 28 in (111.76 x 71.12 cm)
5.0 TON HVAC SPECIFICATIONS*	
WEIGHT:	580 lb (263.1 kg)
COOLING CAPACITY:	62000 BTU/hr // 2250 CFM
DUCTING STORAGE:	Packed in 38 in (96.52 cm) case stowed between HVAC and generator
POWER GENERATION SPECIFICATIONS**	
MODEL:	SHINDAIWA /KWIET POWER DGK15F
PRIME OUTPUT:	15 kW // 12 kW
VOLTAGE // FREQUENCY:	120/240 V // 60Hz
PHASE:	single or three
WEIGHT:	1190 lbs (538.5 kg) dry // 1632 lbs (738.5 kg) wet
FUEL CAPACITY:	60 gal (227.1 L) Diesel fuel tank
PAYLOAD CAPACITY // WEIGHT	
GROSS VEHICLE WEIGHT RATING:	6000 lb (2721.5 kg)
BLANK TRAILER CURB WEIGHT:	2240 lb (1013.6 kg)
PAYLOAD CAPACITY INCLUDING GENERATOR + HVAC:	1548 lb (700 kg)
CURB WEIGHT WITH WET KWIETPOWER 12 KW GENERATOR + 5.0 T HVAC	4452 lb (2014.5 kg)
FEATURES // BENEFITS:	<ul style="list-style-type: none"> • Adjustable coupler attachment with optional coupler style: Full compatibility with any vehicle. • 14-inch axle clearance and all-terrain tires: Increases mobility. • 6000 lb axle rating with 1548 lb payload capacity: Able to haul shelters and accessories. • Locking storage compartments: Convenient and secure tool/jack storage. • 3-point, 5000 lb jack: Level your deployment.

*For full 5.0 Ton HVAC specification list see 5.0 Ton HVAC product sheet.

**For full specification list see generator product sheets.